


Double Extended Input Shafts

Double extended input shafts with keys accommodate manually driven application requirements. The extended shaft is offered with a hex (strong connection method), but alternative configurations such as special lengths,

drilled & tapped shaft ends, step down shafts, or threaded shafts are available. Please contact Winsmith for specific specifications of hex or other special shaft extensions.

DOUBLE EXTENDED INPUT

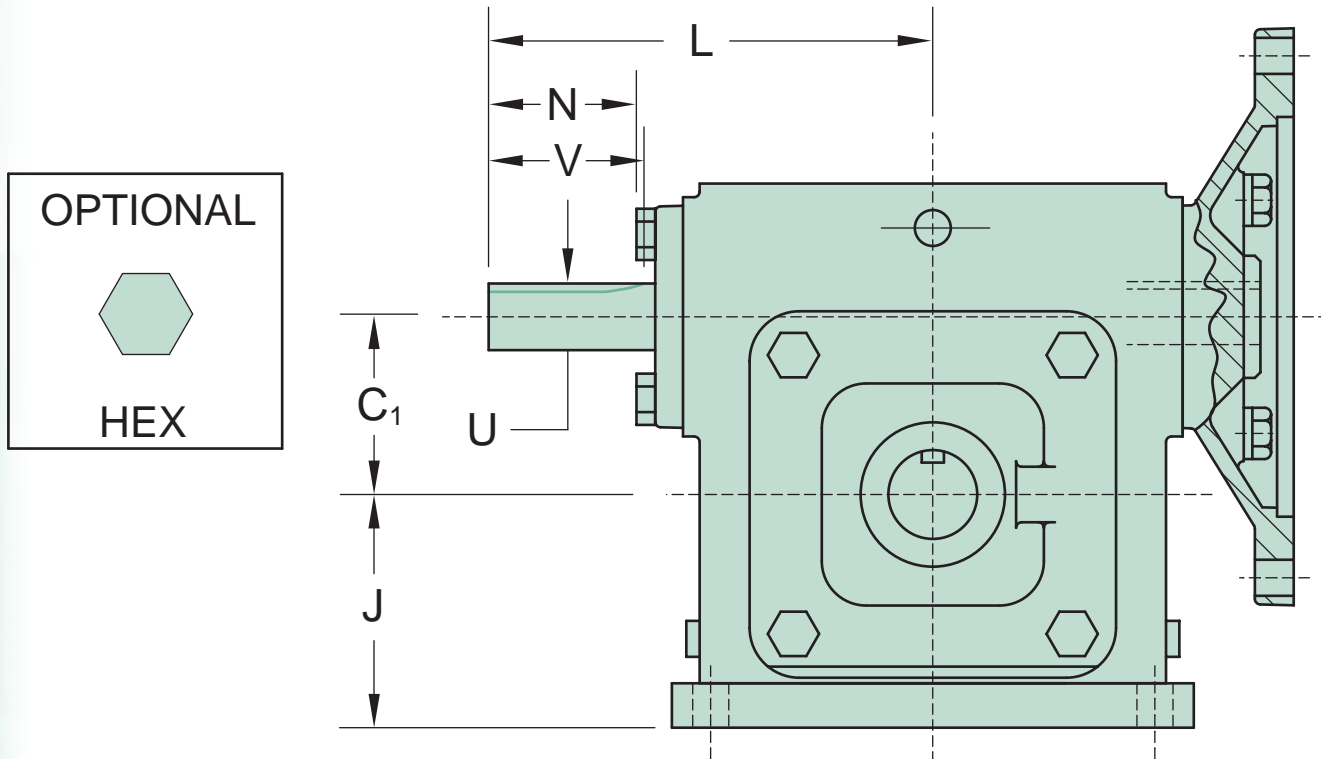

Size	C ₁	D	J	L	INPUT SHAFT DIMENSIONS			
					U*	N	V	KEYWAY
E13	1.333	3.33	2.00	4.13	.625	2.00	1.63	3/16 x 3/32
E17	1.750	4.19	2.44	4.75	.750	1.94	1.69	3/16 x 3/32
E20	2.000	4.63	2.63	5.00	.750	2.19	1.75	3/16 x 3/32
E24	2.375	5.63	3.25	6.50	1.000	2.75	2.38	1/4 x 1/8
E26	2.625	6.13	3.50	6.50	1.000	2.75	2.38	1/4 x 1/8
E30	3.000	7.00	4.00	7.00	.875	3.06	2.38	3/16 x 3/32
E35	3.500	8.00	4.50	7.38	1.000	2.31	2.50	1/4 x 1/8
E43	4.250	9.25	5.00	8.19	1.250	2.31	2.50	1/4 x 1/8

* Shaft diameter tolerances +.000 -.001
Dimensions shown are for construction purposes only. Please contact Winsmith for certified dimension sheets.